

## Natural Convection in a Porous Square Enclosure with Partially Cooled from Vertical Wall

Wiratchada Kalaoka and Supot Witayangkurn\*

Department of Mathematics, Faculty of Science, Khon Kaen University, Khon Kaen  
40002, Thailand

### Abstract

Natural convection flow in a square enclosure filled with a fluid-saturated porous medium is investigated in this paper. The left side wall of the cavity is heated while the right side wall is partially cooled. The cooled portion is located adjacent to the top wall. The remaining walls are adiabatic. The governing equations are solved by using FlexPDE 6.14 Student Version which is based on finite element method. The different parameters in the present study are Darcy number ( $10^{-5} \leq Da \leq 10^{-3}$ ), Grashof number ( $10^3 \leq Gr \leq 10^5$ ), Prandtl number ( $0.70 \leq Pr \leq 10$ ) and Reynolds number ( $10 \leq Re \leq 100$ ). The results are illustrated in the terms of isotherms, streamlines and heatlines. It is found that the strength of fluid motion and the magnitudes of streamlines increase and temperature distribution decrease as Darcy number and Grashof number increase. In addition, a single circulation cell in clockwise direction is formed in the enclosure. The magnitudes of heatlines become larger at higher Darcy numbers, while the increasing of Grashof number has no effect for the magnitudes of heatlines.

**Keywords:** Finite element method; Natural convection; Partially cooled; Porous medium.

### 1. Introduction

Natural convection heat transfer in close cavities filled with a fluid-saturated porous medium has received a great deal of attention. This is due to a large number of applications, for example, oil extraction, fluid flow in geothermal reservoirs, separation processes in chemical industries, efficient drying process, dispersion of chemical contaminants through water saturated soil, crude production and solidification of casting etc.

Investigations of natural convection in an enclosure have been carried out by several investigators. Nawaf *et al.* [1] studied the steady natural convection in a porous square cavity with the non-Darcy model. The left vertical wall of the cavity is heated to a constant temperature, while the right wall is cooled to a constant temperature. Both the horizontal walls are adiabatic. The natural convection in an open-ended square cavity packed with porous medium has been presented by Haghshenas *et al.* [2]. The results obtained are values of Rayleigh number and porosity have considerable influence on heat transfer. Basak *et al.* [3] considered simulation of mixed convection in a square cavity filled with a porous medium with various wall thermal boundary conditions. The steady natural convection flow in a porous square cavity has been reported by Sathiyamoorthy

---

\*Corresponding author: E-mail: supot\_wa@kku.ac.th

*et al.* [4]. The boundary conditions are on the bottom wall is uniformly heated, left vertical wall is linearly heated and the right vertical wall is heated linearly or cooled while top wall is well insulated. Mahapatra *et al.* [5] introduced the influence of thermal radiation and internal heat generation on natural convection flow in a lid-driven square cavity filled with Darcy-Forchheimer porous medium. They observed that the temperature distribution decreases with the increasing in the value of Rayleigh number and the effect of increasing the thermal radiation parameter is to enhance the vertical velocity. Sompong and Witayangkurn [6] also investigated the natural convection in a porous square enclosure having two wavy vertical walls.

Studies on partially cooled cavities filled with a porous media are quite limited. Natural convection heat transfer in a partially cooled and inclined rectangular enclosure filled with saturated porous medium has been presented by Oztop [7]. The results obtained are heat transfer is increased with the increasing of Rayleigh number and dominant parameter on heat transfer and fluid flow as well as aspect ratio. Refaee *et al.* [8] studied numerical simulations of laminar natural convection in partially cooled tilted cavities which the tilt angle of the cavity is varied from  $0^\circ$  to  $90^\circ$ . The diffusion and convection heat transport for natural convection in a differentially heated square cavity has been analyzed by Mobedi *et al.* [9]. Furthermore, Varol *et al.* [10] performed the natural convection in a right-angle enclosure filled with a porous medium and which is partially cooled from the inclined wall.

This paper is the study of two-dimensional natural convection in a porous square enclosure with partially cooled from the side wall of the cavity. The cooled portion is located adjacent to the top wall. The objective of the present paper is to investigate the flow field, temperature distribution and heat flow in the enclosure. Main attention is focused on the effects of Darcy number and Grashof number. This study yields consistent performance over a wide range of parameters, Darcy number ( $Da = 10^{-5} - 10^{-3}$ ), Grashof number ( $Gr = 10^3 - 10^5$ ), Prandtl number ( $Pr = 0.7 - 10$ ) and Reynolds number ( $Re = 1 - 100$ ).

## 2. Notation and Physical Domain

$Da$	Darcy number	$U, V$	$U$ and $V$ components of dimensionless velocity
$g$	acceleration due to gravity, $\text{ms}^{-2}$	$x, y$	distance along $x$ and $y$ coordinates
$K$	permeability, $\text{m}^2$	$X, Y$	dimensionless distance along $X$ and $Y$ coordinates
$L$	length of the square cavity, $\text{m}$	<i>Greek symbols</i>	
$p$	pressure, $\text{Pa}$	$\alpha$	thermal diffusivity, $\text{m}^2 \text{s}^{-1}$
$P$	dimensionless pressure	$\beta$	volume expansion coefficient, $\text{K}^{-1}$
$Pr$	Prandtl number	$\gamma$	penalty parameter
$Ra$	Rayleigh number	$\theta$	dimensionless temperature
$Re$	Reynolds number	$\nu$	kinematic viscosity, $\text{ms}^{-1}$
$Gr$	Grashof number	$\rho$	density, $\text{kg m}^{-3}$
$T$	temperature, $\text{K}$	$\psi$	streamfunction
$T_h$	temperature of the left heated wall, $\text{K}$	$\Pi$	heatfunction
$T_c$	temperature of the partially cooled wall, $\text{K}$		
$u, v$	$x$ and $y$ components of velocity		

The physical domain is shown in Figure 1. It consists of the coordinate system of two-dimensional square cavity filled with a fluid-saturated porous medium. The left vertical wall is heated with a constant temperature  $T_h$ , the right vertical wall is partially cooled with a constant temperature  $T_c$ , where  $T_h > T_c$  and the partially cooled is placed adjacent to the top wall. The other walls are insulated. Length of the square cavity is  $L$  and length of the cooled portion on the right vertical wall is kept constant at  $L/2$ .

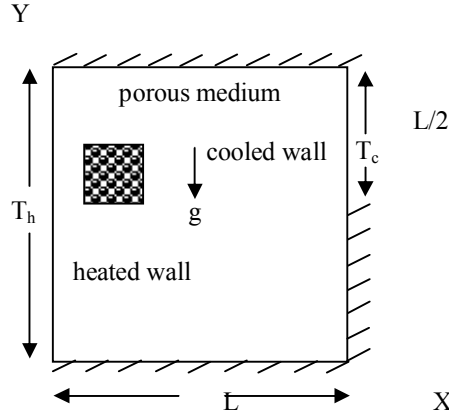


Figure 1 Physical domain with coordinates

### 3. Mathematical Formulation

All the physical properties are assumed to be constant except the density in buoyancy term. Change in density due to temperature variation is calculated using Boussinesq approximation. Another important assumption is that the local thermal equilibrium (LTE) is valid. The governing equations for two-dimensional natural convection flow in a porous square enclosure using conservation of mass, momentum and energy can be written as

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0, \quad (1)$$

$$u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = -\frac{1}{\rho} \frac{\partial p}{\partial x} + \nu \left( \frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2} \right) - \frac{\nu}{K} u, \quad (2)$$

$$u \frac{\partial v}{\partial x} + v \frac{\partial v}{\partial y} = -\frac{1}{\rho} \frac{\partial p}{\partial y} + \nu \left( \frac{\partial^2 v}{\partial x^2} + \frac{\partial^2 v}{\partial y^2} \right) - \frac{\nu}{K} v + g \beta (T - T_c), \quad (3)$$

$$u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} = \alpha \left( \frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} \right). \quad (4)$$

The boundary conditions are:

$$u(x, 0) = u(x, L) = u(0, y) = u(L, y) = 0,$$

$$v(x, 0) = v(x, L) = v(0, y) = v(L, y) = 0,$$

$$\frac{\partial T}{\partial y}(x, 0) = \frac{\partial T}{\partial y}(x, L) = 0, \quad T(0, y) = T_h,$$

$$\frac{\partial T}{\partial x}(L, y) = 0 \text{ when } 0 \leq y \leq \frac{L}{2}, T(L, y) = T_c \text{ when } \frac{L}{2} \leq y \leq L. \quad (5)$$

The above governing equations are transformed to dimensionless form by using the following change of variables:

$$X = \frac{x}{L}, \quad Y = \frac{y}{L}, \quad U = \frac{u}{U_0}, \quad V = \frac{v}{U_0}, \quad \theta = \frac{T - T_c}{T_h - T_c}, \quad P = \frac{p}{\rho U_0^2},$$

$$Pr = \frac{\nu}{\alpha}, \quad Da = \frac{K}{L^2}, \quad Gr = \frac{g\beta(T_h - T_c)L^3}{\nu^2}, \quad Re = \frac{U_0 L}{\nu}.$$

The governing equations (1)-(4) reduce to the following non-dimensional form

$$\frac{\partial U}{\partial X} + \frac{\partial V}{\partial Y} = 0, \quad (6)$$

$$U \frac{\partial U}{\partial X} + V \frac{\partial U}{\partial Y} = -\frac{\partial P}{\partial X} + \frac{1}{Re} \left( \frac{\partial^2 U}{\partial X^2} + \frac{\partial^2 U}{\partial Y^2} \right) - \frac{1}{Re Da} U, \quad (7)$$

$$U \frac{\partial V}{\partial X} + V \frac{\partial V}{\partial Y} = -\frac{\partial P}{\partial Y} + \frac{1}{Re} \left( \frac{\partial^2 V}{\partial X^2} + \frac{\partial^2 V}{\partial Y^2} \right) - \frac{1}{Re Da} V + \frac{Gr}{Re^2} \theta, \quad (8)$$

$$U \frac{\partial \theta}{\partial X} + V \frac{\partial \theta}{\partial Y} = \frac{1}{Re Pr} \left( \frac{\partial^2 \theta}{\partial X^2} + \frac{\partial^2 \theta}{\partial Y^2} \right). \quad (9)$$

In order to solve the equations (7)-(8) by eliminating the pressure, we use the penalty finite element method with a penalty parameter [11] such that

$$P = -\gamma \left( \frac{\partial U}{\partial X} + \frac{\partial V}{\partial Y} \right). \quad (10)$$

Typical values of  $\gamma$  that yield consistent solutions are  $10^7$ . Substituting (10) into (7) and (8) are reduced to

$$U \frac{\partial U}{\partial X} + V \frac{\partial U}{\partial Y} = \gamma \frac{\partial}{\partial X} \left( \frac{\partial U}{\partial X} + \frac{\partial V}{\partial Y} \right) + \frac{1}{Re} \left( \frac{\partial^2 U}{\partial X^2} + \frac{\partial^2 U}{\partial Y^2} \right) - \frac{1}{Re Da} U, \quad (11)$$

$$U \frac{\partial V}{\partial X} + V \frac{\partial V}{\partial Y} = \gamma \frac{\partial}{\partial Y} \left( \frac{\partial U}{\partial X} + \frac{\partial V}{\partial Y} \right) + \frac{1}{Re} \left( \frac{\partial^2 V}{\partial X^2} + \frac{\partial^2 V}{\partial Y^2} \right) - \frac{1}{Re Da} V + \frac{Gr}{Re^2} \theta. \quad (12)$$

The transformed boundary conditions are:

$$U(X, 0) = U(X, 1) = U(0, Y) = U(1, Y) = 0,$$

$$V(X, 0) = V(X, 1) = V(0, Y) = V(1, Y) = 0,$$

$$\frac{\partial \theta}{\partial Y}(X, 0) = \frac{\partial \theta}{\partial Y}(X, 1) = 0, \quad \theta(0, Y) = 1,$$

$$\frac{\partial \theta}{\partial X}(1, Y) = 0 \text{ when } 0 \leq Y \leq \frac{1}{2}, \quad \theta(1, Y) = 0 \text{ when } \frac{1}{2} \leq Y \leq 1. \quad (13)$$

The governing equations ((9), (11) and (12)) are solved by using FlexPDE 6.14 Student Version which is based on finite element method.

The streamfunction ( $\psi$ ) is used to visualize the convective fluid flow in the enclosure.

The dimensionless streamfunction is defined as  $U = \frac{\partial \psi}{\partial Y}$  and  $V = -\frac{\partial \psi}{\partial X}$ . Thus, the equation (6) is changed to (14)

$$\frac{\partial^2 \psi}{\partial X^2} + \frac{\partial^2 \psi}{\partial Y^2} = \frac{\partial U}{\partial Y} - \frac{\partial V}{\partial X}. \quad (14)$$

The no-slip condition is valid at all boundaries as there is no cross flow. Hence, the boundaries condition for streamfunction is  $\psi = 0$ .

The heatfunction ( $\Pi$ ) is used to visualize the convective heat flow in the enclosure. The dimensionless heatfunction is defined as  $\frac{\partial \Pi}{\partial Y} = U\theta - \frac{\partial \theta}{\partial X}$  and  $-\frac{\partial \Pi}{\partial X} = V\theta - \frac{\partial \theta}{\partial Y}$ . Thus, the equation (6) is changed to (15)

$$\frac{\partial^2 \Pi}{\partial X^2} + \frac{\partial^2 \Pi}{\partial Y^2} = \frac{\partial}{\partial Y}(U\theta) - \frac{\partial}{\partial X}(V\theta), \quad (15)$$

with the boundary conditions:


$$\begin{aligned} \frac{\partial \Pi}{\partial X} &= 1 \text{ for left heated wall,} \\ \frac{\partial \Pi}{\partial X} &= 0 \text{ for cooled portion right wall,} \\ \Pi &= 0 \text{ for adiabatic walls.} \end{aligned} \quad (16)$$

## 4. Results and Discussion

The computational results for the problem of natural convection in a porous square enclosure with partially cooled right vertical wall are presented in this section. The cooled portion is located adjacent to the top wall. The procedure mentioned previously is coded into FlexPDE 6.14 Student Version which is based on finite element method. The results are carried out for different values of Darcynumber ( $10^{-5} \leq Da \leq 10^{-3}$ ), Grashofnumber ( $10^3 \leq Gr \leq 10^5$ ), Prandtlnumber ( $0.7 \leq Pr \leq 10$ ) and Reynolds number ( $1 \leq Re \leq 100$ ). Effects of Darcy number ( $Da$ ) and Grashof number ( $Gr$ ) are considered. The flow, temperature and heat fields within the enclosure are shown in terms of streamlines isotherms and heatlines.


### 4.1 Effect of Darcy number

Figures 2–4 illustrate the isotherms, streamlines and heatlines inside a partially cooled square cavity filled with a porous medium. Three different  $Da$  are chosen as  $10^{-5}$ ,  $10^{-4}$  and  $10^{-3}$ . The values of  $Gr$ ,  $Pr$  and  $Re$  are fixed at  $10^5$ , 0.7 and 1, respectively.

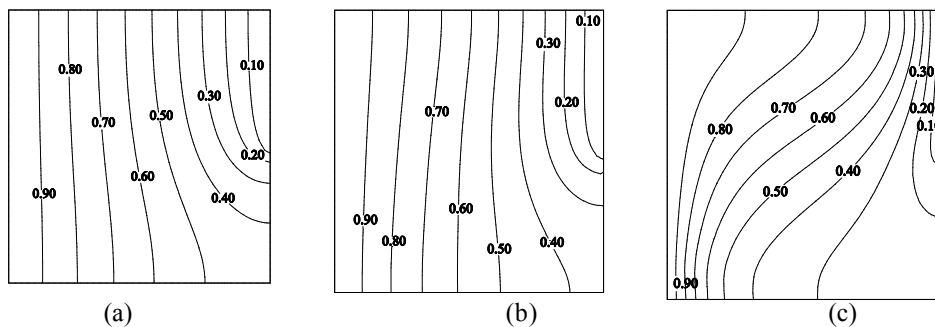


**Figure 2** Isotherms with  $Gr = 10^5$ ,  $Pr = 0.7$ ,  $Re = 1$  for (a)  $Da = 10^{-5}$  (b)  $Da = 10^{-4}$  and (c)  $Da = 10^{-3}$ .

It is observed that isotherms are smooth. At low Darcy number ( $Da=10^{-5}$ ), isotherms are almost parallel to the side walls. The isotherm moves downward to the bottom wall for  $\theta=0.40$  (Figure 2(b)). As  $Da$  is increased to  $10^{-3}$ , values of isotherms with  $\theta=0.30-0.90$  move toward to the left side wall [Figure 2(c)].

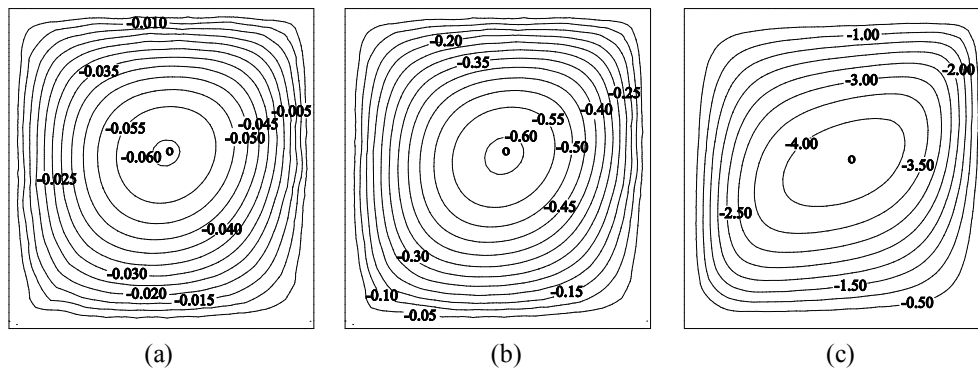

**Figure 3** Streamlines with  $Gr=10^5$ ,  $Pr=0.7$ ,  $Re=1$  for (a)  $Da=10^{-5}$  (b)  $Da=10^{-4}$  and (c)  $Da=10^{-3}$ .

It is noted that a single circulation cell of streamlines is formed in clockwise rotating direction for all values of  $Da$ . The flow of streamlines is weak as seen from the maximum absolute value of streamfunction is 0.060 (Figure 3(a)). As  $Da$  is increased to  $10^{-4}$ , the flow characteristic is similar to the case of  $Da=10^{-5}$  but the intensity of fluid flow is stronger. The flow circulation cell is found to be changed with the main vortex expands in size. The maximum absolute value of streamfunction is 4.00 [Figure 3(c)].

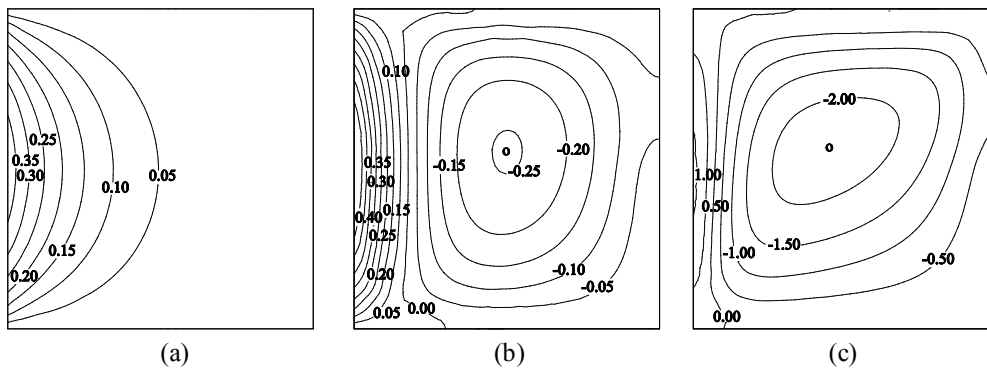


**Figure 4** Heatlines with  $Gr=10^5$ ,  $Pr=0.7$ ,  $Re=1$  for (a)  $Da=10^{-5}$  (b)  $Da=10^{-4}$  and (c)  $Da=10^{-3}$ .

The heatlines are smooth and these heatlines disperse near the right vertical wall (Figure 4(a)). As  $Da$  is increased to  $10^{-4}$ , the main heat flow rotates in clockwise direction with the maximum absolute value of heatfunction is 0.25. In addition the dense heatlines appear near

heated wall. The less dense heatlines are also observed near heated wall compared to the case of  $Da = 10^{-4}$  and the strength of heatlines increases for  $Da = 10^{-3}$  (Figure 4(c)).


#### 4.2 Effect of Grashof number

Isotherms, streamlines and heatlines inside a partially cooled square enclosure filled with a porous medium are plotted in Figures 5–7. Three different  $Gr$  are chosen as  $10^3$ ,  $10^4$  and  $10^5$ . The values of  $Da$ ,  $Pr$  and  $Re$  are fixed at  $10^{-3}$ , 10 and 10, respectively.

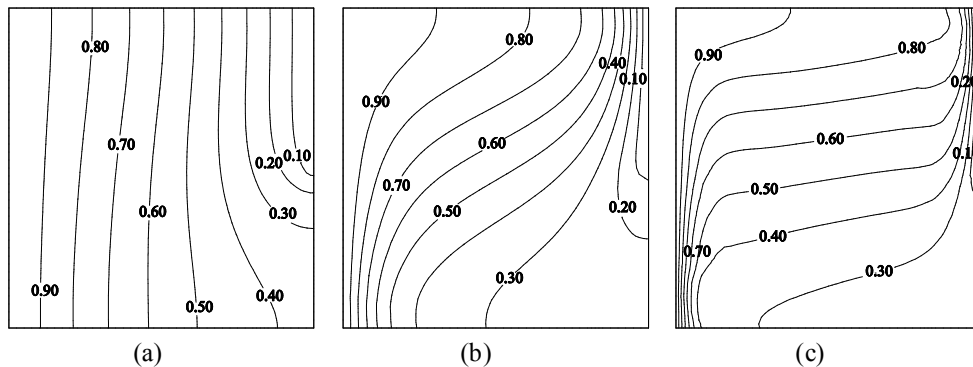

**Figure 5** Isotherms with  $Da = 10^{-3}$ ,  $Pr = 10$ ,  $Re = 10$  for (a)  $Gr = 10^3$  (b)  $Gr = 10^4$  and (c)  $Gr = 10^5$ .


It may be noted that isotherms are smooth. The isotherms are almost parallel to the side walls (Figure 5(a)). As  $Gr$  is increased to  $10^4$ , isotherms move toward the heated wall with  $\theta = 0.30 - 0.90$ . Furthermore, isotherms with  $\theta \geq 0.30$  are almost parallel to the horizontal walls (Figure 5(c)).

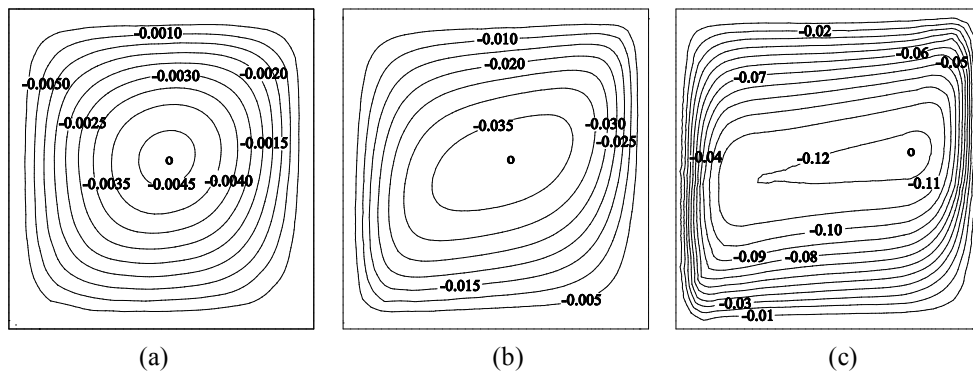

**Figure 6** Streamlines with  $Da = 10^{-3}$ ,  $Pr = 10$ ,  $Re = 10$  for (a)  $Gr = 10^3$  (b)  $Gr = 10^4$  and (c)  $Gr = 10^5$ .

The convection streamfunction takes negative values due to the clockwise rotation of convective fluid flow (Figures 6(a)-6(c)). Weak streamlines circulation cell with the maximum absolute value of streamfunction is 0.0045 for  $Gr = 10^3$ . Single flow circulation cell is changed with the main vortex expands in size (Figure 6(b)). As  $Gr$  is increased to  $10^5$ , the flow

circulation cell elongates in the enclosure and the intensity of fluid motion is stronger with  $|\psi|_{max} = 0.12$  (Fig. 6(c)).

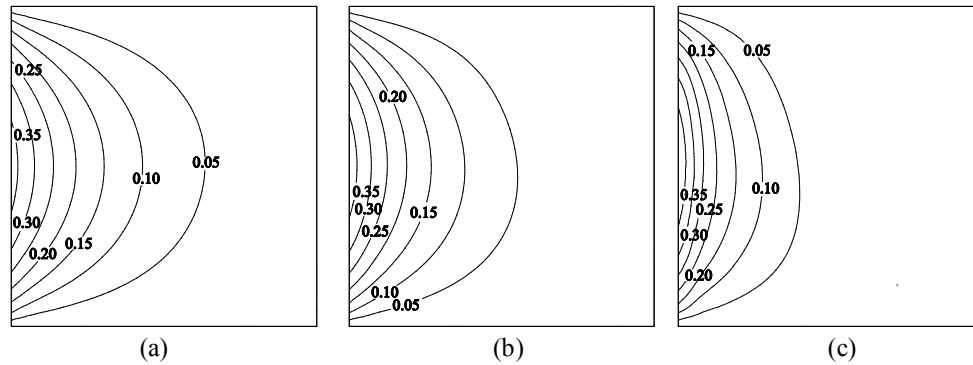

**Figure 7** Heatlines with  $Da = 10^{-3}$ ,  $Pr = 10$ ,  $Re = 10$  for (a)  $Gr = 10^3$  (b)  $Gr = 10^4$  and (c)  $Gr = 10^5$ .

At low Grashof number ( $Gr = 10^3$ ), the heatlines are smooth and these heatlines disperse near the heated side wall (Figure 7(a)). Moreover, the heatlines are shifted toward to the heated side wall as  $Gr$  are increased to  $10^4$  and  $10^5$  (Figures 7(b)-7(c)). The magnitudes of heatlines no change for all values of  $Gr$ .

## 5. Conclusions

This study investigates the natural convection flow in a porous square enclosure with partially cooled. The right vertical wall is partially cooled while the left vertical wall is heated and the remaining walls are adiabatic. The governing equations are solved by using a software package FlexPDE 6.14 Student Version. The main parameters of interest are Darcy number ( $10^{-5} \leq Da \leq 10^{-3}$ ), Grashof number ( $10^3 \leq Gr \leq 10^5$ ), Prandtl number ( $0.7 \leq Pr \leq 10$ ) and Reynolds number ( $1 \leq Re \leq 100$ ). The effects of parameters such as Darcy number and Grashof number are examined.

From the study results, the temperature distribution decrease as values of  $Da$  and  $Gr$  increase. With both of these parameters, a single circulation cell occurred in clockwise rotating direction. In addition, the magnitudes of streamlines and heatlines become larger with high  $Da$ . In the case of increasing  $Gr$ , the main vortex of circulation cell expands in size and the strength of buoyant convection flow is enhanced. Furthermore, the magnitudes of heatlines no change with increasing of value of  $Gr$ .

## 6. Acknowledgements

This work was supported by Department of Mathematics, Khon Kaen University, Khon Kaen.



### References

- [1] Saeid, N.H. and Pop, I. **2005**. Non-Darcy natural convection in a square cavity filled with a porous media, *Fluid Dynamics Research*, 36, 35-43.
- [2] Haghshenas, A., Rafati Nasr, M. and Rahimian, M.H. **2010**. Numerical simulation of natural convection in an open-ended square cavity filled with porous medium by lattice Boltzmann method, *International Communications in Heat and Mass Transfer*, 37, 1513-1519.
- [3] Basak, T, Krishna Pradeep, P.V., Roy, S. and Pop, I. **2011**. Finite element based heatline approach to study mixed convection in a porous square cavity with various wall thermal boundary conditions, *International Journal of Heat and Mass Transfer*, 54, 706-1727.
- [4] Sathiyamoorth, M., Basak, T., Roy, S. and Pop, I. **2007**. Steady natural convection flow in a square cavity filled with a porous medium for linearly heated side wall(s). *International Journal of Heat and Mass Transfer*, 50, 1892-1901.
- [5] Mahapatra, T.R., Pal, D. and Mondal, S. **2011**. Natural convection in a lid-driven square cavity filled with darcy-forchheimer porous medium in the presence of thermal radiation. *International Journal of Nonlinear Science*, 11(3), 366-379.
- [6] Sompong, P. and Witayangkurn, S. **2012**. Simulation of natural convection in a complicated enclosure with two wavy vertical walls. *Applied Mathematical Science*, 6, 2833-2842.
- [7] Oztop, H.F. **2007**. Natural convection in partially cooled and inclined porous rectangular enclosures. *International Journal of Thermal Sciences*, 46, 149-156.
- [8] El-refaee, M.M., Elsayed, M.M., Al-najem, N.M. and Noor, A.A. **1998**. Natural convection in partially cooled tilted cavities. *International Journal for Numerical Methods in Fluids*, 28, 477-499.
- [9] Mobedi, M., Sunden, B and Özkol, Ü. **2010**. Visualization of diffusion and convection heat transport in a square cavity with natural convection. *International Journal of Heat and Mass Transfer*, 53, 99-109.
- [10] Varol, Y., Oztop, H. and Pop, I. **2009**. Natural convection in right-angle porous trapezoidal enclosure partially cooled from inclined wall. *International Journal of Heat and Mass Transfer*, 36, 6-15.
- [11] Reddy, J.N. **1993**. *An introduction to the finite element method*, McGraw-Hill, New York.